



## Datasheet

# FXP II Acquisition system

### Innovative Approach

The **FXP II Acquisition system** is the industry first CoaXPress image acquisition system without range limitations. The system uses fiber optic cables to provide high resolution image acquisition interface for distances up to 80 km in single-mode and up to 300 m in multi-mode. The FXP II Acquisition system is capable of receiving video streams from up to 4 CoaXPress links in single, dual or quad modes. It is used for simultaneous capture from up to four cameras. Each link supports standard CoaXPress bitrates up to 12.5 Gbps. These features make the **FXP II Acquisition system** ideally suited for industrial, defense and aerospace Machine Vision Systems and applications.

### Intelligent Design

The system consists of Komodo II CoaXPress over Fiber (CoF) Frame Grabber and CoaXPress to CoF Device. The remote unit converts CoaXPress links to standard CoF interface.

The **FXP II Acquisition system** uses a high-performance flow through DMA to transmit video streams to computer memory through PCIe interface with minimal latency. This product also provides GPIO for machine control signals, such as triggers, shaft encoders, exposure control and general I/O, which can be controlled aside video stream acquisition. The Frame Grabber utilizes PCIe Gen3 x8 links for communication with Host PC for video uploading and configuration.

### Key Features:

- Solves distance limitation of CoaXPress
- Extension for distances up to 80 km in single-mode and up to 300 m in multi-mode
- Plug and Play, no need to configure
- Up to 4 CoaXPress links support
- Up to 4 Multi-streams
- PCIe Gen3 x8 Half-length card
- Camera controls and triggers
- Flexible machine I/O:
  - 4 TTL configurable I/Os
  - 4 LVCMOS configurable I/Os
  - 2 LVDS inputs; 2 LVDS outputs
  - 4 opto-isolated inputs
  - 4 opto-isolated outputs
  - 8 quadrature rotary encoders
  - Integrated strobe controller
  - 4 timers
- CoaXPress v2.1 compliant
- Power over CoaXPress with 13 W per link
- Multiple Camera synchronization
- Multiple Frame Grabbers synchronization
- GUI interface
- Supporting Windows, Linux OS and Nvidia Jetpack
- API for custom application development
- Plug-in modules for Matlab, HALCON and Labview
- Gen<i>Cam compliant
- GenTL support
- Data rates up to 12.5 Gbps per link
- Transfer Rate of up to 55 Gbps
- -40°C to +70°C operating environment temperature

# TECHNICAL DATA

General	
Form factor	PCI Express card + remote device
Format	Standard profile, half-length, 8-lane PCI Express card
Cooling method	Frame Grabber: fan-cooled heatsink (Optional passive heatsink) Remote device: Air cooling. Passive or active heatsink available on request
Mounting	For insertion in a standard height, 8-lane or higher, PCI Express card slot
Frame Grabber's Dimensions	Frame Grabber: 167.65 mm x 111.15 mm (6.6" x 4.4") Remote device: 117 mm x 114.5 mm x 23.5 mm (4.6" x 4.5" x 0.92")
Frame Grabber's Weight	Frame Grabber: 250 g (8.8 oz) Remote device: 300 g (10.58 oz)
Host bus	
Standard	PCI Express 3.0
Link width	<ul style="list-style-type: none"> <li>8 lanes</li> <li>1, 2 or 4 lanes with reduced performance</li> </ul>
Link speed	<ul style="list-style-type: none"> <li>8.0 GT/s (PCIe 3.0)</li> <li>5.0 GT/s (PCIe 2.0) with reduced performance</li> </ul>
Maximum payload size	2,048 bytes
DMA	<ul style="list-style-type: none"> <li>64-bit addressing support</li> <li>Scatter gather support</li> <li>Physical address support (GPU transfers)</li> </ul>
Peak delivery bandwidth	7,877 MB/s
Effective (sustained), delivery bandwidth	6,695 MB/s (Host PC dependent)
Power consumption	Frame Grabber: 16.8 W, excluding camera and I/O power output Remote device: < 11 W (Self consumption not including cameras)
Camera / video inputs	
Interface standard(s)	CoaXPress v2.1
Status LEDs	<ul style="list-style-type: none"> <li>1 bicolor status LED per connector</li> <li>4 System status LEDs</li> </ul>
Number of cameras	Up to 4
Synchronization between cameras	Yes
Line-scan cameras supported	Yes
Maximum aggregated camera data transfer rate	63.8 Gbit/s
Supported down-connection speeds	<ul style="list-style-type: none"> <li>10.3 Gbit/s</li> <li>12.5 Gbit/s</li> <li>13.75 Gbit/s</li> <li>15.9375 Gbit/s</li> </ul>
Maximum stream packet size	8,192 bytes
Camera types	<p>Area-scan cameras:</p> <ul style="list-style-type: none"> <li>Gray-scale and color (RGB and Bayer CFA)</li> <li>Single-tap (1X-1Y) progressive-scan</li> <li>Single-tap (1X-1Y) interlaced</li> </ul> <p>Line-scan cameras:</p> <ul style="list-style-type: none"> <li>Gray-scale and color RGB</li> </ul>
General Purpose Inputs and Outputs	
Number of lines	<p>20 I/O lines:</p> <ul style="list-style-type: none"> <li>2 differential inputs</li> <li>2 differential outputs</li> <li>4 singled-ended TTL inputs/outputs</li> <li>4 single-ended LVTTL inputs/outputs</li> <li>4 opto-isolated inputs</li> </ul>


Usage	<ul style="list-style-type: none"> <li>4 opto-isolated outputs</li> <li>Any System I/O input lines can be connected to any I/O output line</li> <li>Any I/O input line can be used to decode A/B and Z signals of a motion encoder</li> <li>Any I/O input line can generate any trigger event</li> <li>Any I/O input line can trigger a timer</li> </ul>
Electrical specifications	<ul style="list-style-type: none"> <li>Differential lines - LVDS compatible</li> <li>TTL lines - 5V TTL compliant</li> <li>LVTTL lines - 3.3V LVTTL compliant</li> <li>Isolated lines - opto isolated lines with voltage range up to 30 V</li> </ul>
Filter control	<ul style="list-style-type: none"> <li>Glitch removal filter for Encoders and Triggers</li> <li>Configurable filter time between 0 <math>\mu</math>s and 34 ms</li> <li>Filter time resolution of 8 ns</li> <li>Glitch removal filter for Encoders and Triggers</li> </ul>
Polarity control	Yes
Encoders	<ul style="list-style-type: none"> <li>4 quadrature encoders with A/B and Z inputs</li> <li>32bit position counter</li> <li>Forward and backward counting</li> <li>Position trigger support</li> <li>Noise filtering</li> </ul>
Timers	<ul style="list-style-type: none"> <li>4 general-purpose timers</li> <li>Configurable delay and duration</li> <li>32-bit accumulator</li> </ul>
Event reporting	<ul style="list-style-type: none"> <li>64-bit system timestamp event reporting</li> <li>Each I/O line can generate an event on a configurable edge</li> <li>Each Timer can generate an event</li> <li>Each encoder can generate an event</li> </ul>
Frame Grabber synchronization	
Synchronization	Precise area and line-scan cameras synchronization across different frame grabbers
Area-scan camera control	
Trigger	<ul style="list-style-type: none"> <li>Precise control of asynchronous reset cameras, with exposure control</li> <li>Support of camera exposure/readout overlap</li> <li>Support of triggering from encoder or timer</li> <li>Support of external hardware trigger, with optional delay, filtering and trigger decimation</li> </ul>
Strobe	<p>Accurate control of the strobe position for strobe light sources.</p> <p>Support of early and late strobe pulses</p>
Line-scan camera control	
Scan/page trigger	<ul style="list-style-type: none"> <li>Precise control of start-of-scan and end-of-scan triggers</li> <li>Support of external hardware trigger, with optional delay and filtering</li> <li>Support of triggering from an encoder</li> <li>Support of infinite acquisition, without missing lines</li> </ul>
Line trigger	Support for quadrature motion encoders, with programmable filters, selection of acquisition direction and backward motion compensation
Line strobe	Accurate control of the strobe position for strobe light sources
On-board processing	
On-board memory	4 GByte DDR4
Bayer de-mosaic	<ul style="list-style-type: none"> <li>Full 16-bit resolution</li> <li>Bilinear 3x3</li> <li>Bilinear 3x2 for linescan with gradient correction</li> </ul>
Color transformation	<ul style="list-style-type: none"> <li>Full 16bit resolution 18bit coefficients table:</li> <li>Color space conversion</li> <li>Gain and Offset</li> </ul>
Decimation	Line skip
Additional features	Unpacking of 10-/12-/14-bit to 16-bit LSB aligned
Frame timestamp	64-bit with 8 ns precision

Data stream statistics	<p>Measurement of:</p> <ul style="list-style-type: none"> <li>• Frame rate</li> <li>• CRC Errors</li> <li>• Received/Dropped frames</li> <li>• Received/Dropped packets</li> <li>• Test packets</li> </ul>
Event signaling and counting	<p>The application software can be notified of the occurrence of various events:</p> <ul style="list-style-type: none"> <li>• Newly acquired buffers</li> <li>• Camera and Illumination control events</li> <li>• I/O events</li> <li>• Timer events</li> <li>• Encoder events</li> </ul>
<b>Software</b>	
Host PC operating system	<ul style="list-style-type: none"> <li>• Microsoft Windows 10 64-bit version</li> <li>• Microsoft Windows 11 64-bit version</li> <li>• Signed and certified kernel driver supporting Windows 10 and 11</li> <li>• Source code Linux kernel driver (Automatically compiled during installation)</li> <li>• Tested for Ubuntu 18.04, 20.04 and 22.04 versions</li> <li>• Nvidia Xavier AGX (Jetpack 5.1.1 and 4.6.1)</li> <li>• Nvidia Orin AGX (Jetpack 5.1.1)</li> </ul>
Gen<i>Cam	<ul style="list-style-type: none"> <li>• Support of Gen&lt;i&gt;Cam 3.2</li> <li>• Full camera and Frame Grabber parameters configuration</li> </ul>
Buffer management	<ul style="list-style-type: none"> <li>• Circular buffer support</li> <li>• Accumulation of several frames/lines to single buffer to reduce CPU load</li> <li>• Flexible buffer queuing</li> <li>• DMA Buffer filling directly to system memory</li> </ul>
GUI	<ul style="list-style-type: none"> <li>• Supported for Windows and Linux OS</li> <li>• Multi camera display and configuration</li> <li>• Image/video recording and playback</li> </ul>
Debugging capabilities	<ul style="list-style-type: none"> <li>• Event logging</li> <li>• Statistics counters</li> </ul>
APIs	<ul style="list-style-type: none"> <li>• Gen&lt;i&gt;Cam, GenTL producer libraries, ANSI C, Python and NET bindings</li> <li>• x86_64 dynamic library designed to be used with ISO-compliant C runtime</li> <li>• Allows for development of x86_64 applications</li> <li>• Plug-in modules for Matlab, HALCON, Cognex and Labview</li> <li>• Export straightforward, unified and easy-to-use API across all Grabber types</li> <li>• Include practical examples based on API functions, for supported language wrappers</li> <li>• Documentation includes sample snippets for API usage</li> </ul>
<b>Environmental conditions</b>	
Operating ambient air temperature	-40 °C to +70 °C (-40°F to +158 °F)
Operating ambient air humidity	10% to 90% RH non-condensing
Storage ambient air temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage ambient air humidity	10% to 90% RH non-condensing
<b>Certifications</b>	
Electromagnetic - EMC standards	<ul style="list-style-type: none"> <li>• The European EMC Directive 2014/30/EU</li> <li>• The United States FCC rule 47 CFR 15</li> </ul>
EMC - emission	<ul style="list-style-type: none"> <li>• EN 55032:2015 Class B</li> <li>• FCC 47 Part 15 Class B</li> </ul>
EMC - immunity	<ul style="list-style-type: none"> <li>• EN 55035:2017 Class B</li> <li>• EN 61000-4-3</li> <li>• EN 61000-4-4</li> <li>• EN 61000-4-6</li> </ul>
Flammability	PCB compliant with UL 94 V-0
RoHS	Compliant with the European Union Directive 2011/65/EU (ROHS2)
REACH	Compliant with the European Union Regulation No 1907/2006
WEEE	Must be disposed of separately from normal household waste and must be recycled according to local regulations


Ordering Information	
FXP II Acquisition system	KY-FXP-II
CoaXPress Range Extender – Device unit	KY-FEXT-II-D
Komodo II CoaXPress over Fiber Frame Grabber	KY-FGF-II-COF
SFP+ single-mode module 10 km	KY-SFP-10GLR-31
SFP+ multi-mode module 300 m	KY-SFP-10GSR-85
SFP+ single-mode bidirectional module	KY-SFP-BD-10G-10
Fiber cable	KY-FCA-X-XX
CoaXPress Cable	KY-CCA-X-XX
Power supply 24V, 90W	KY_PWR24_90

# MECHANICAL DRAWINGS

## Komodo II CoaXPress over Fiber

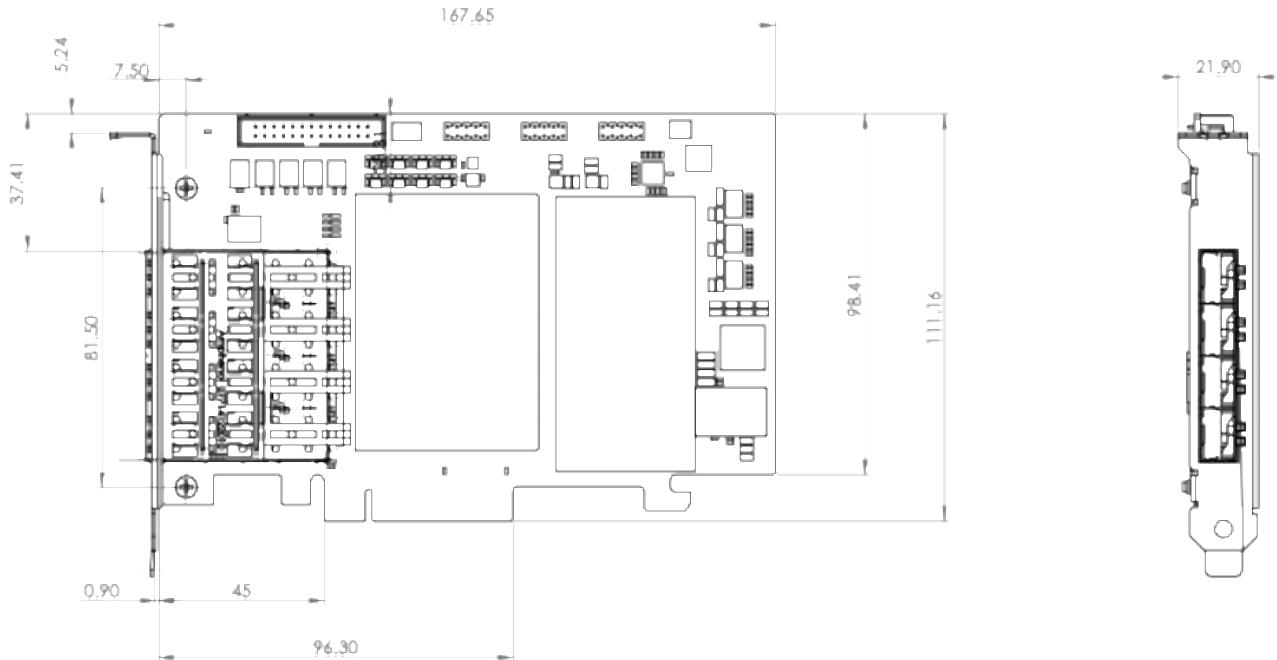


## CoaXPress remote device

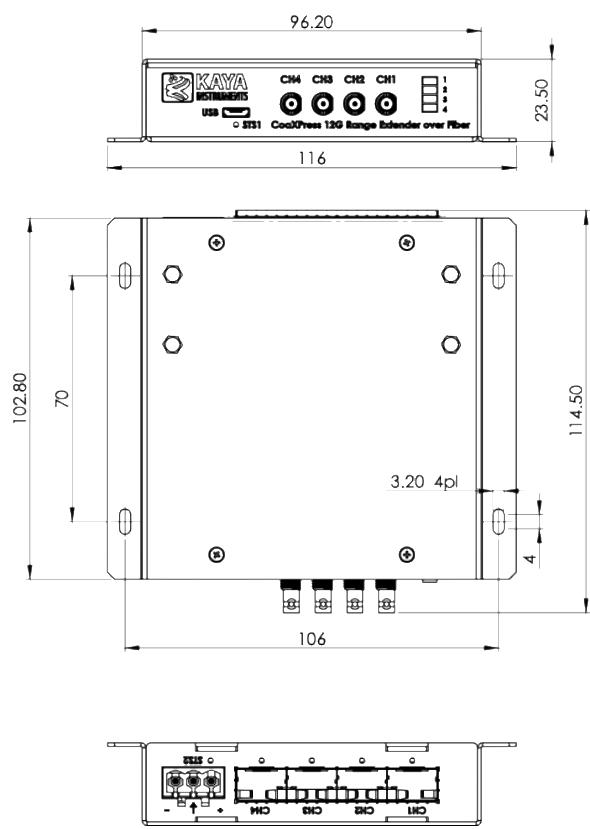


Dimensions are in millimeters.

# SYSTEM STRUCTURE


Single FEXT - Single camera topology diagram:

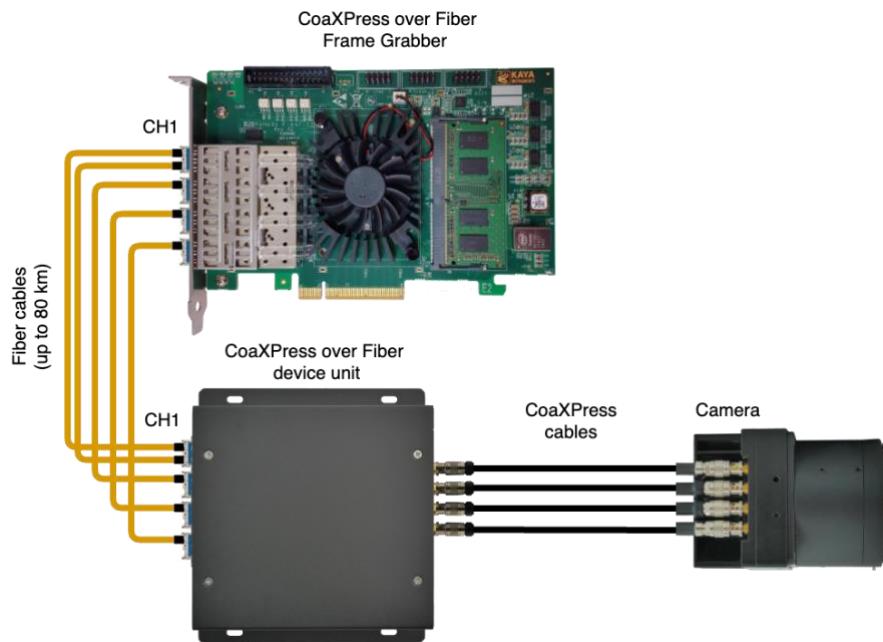

Single FEXT - Dual camera topology diagram:

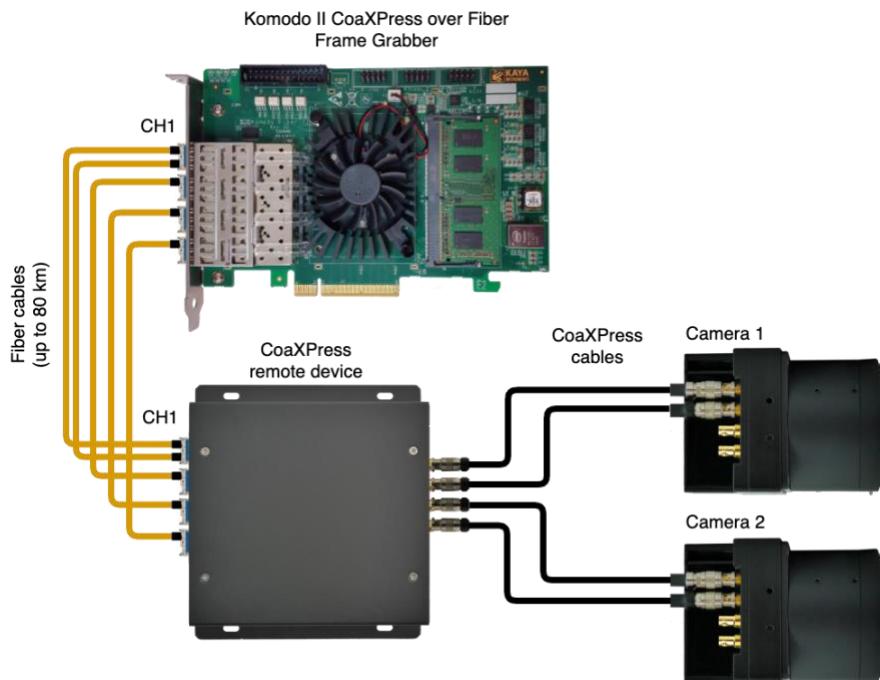

Single FEXT - Quad camera topology diagram:

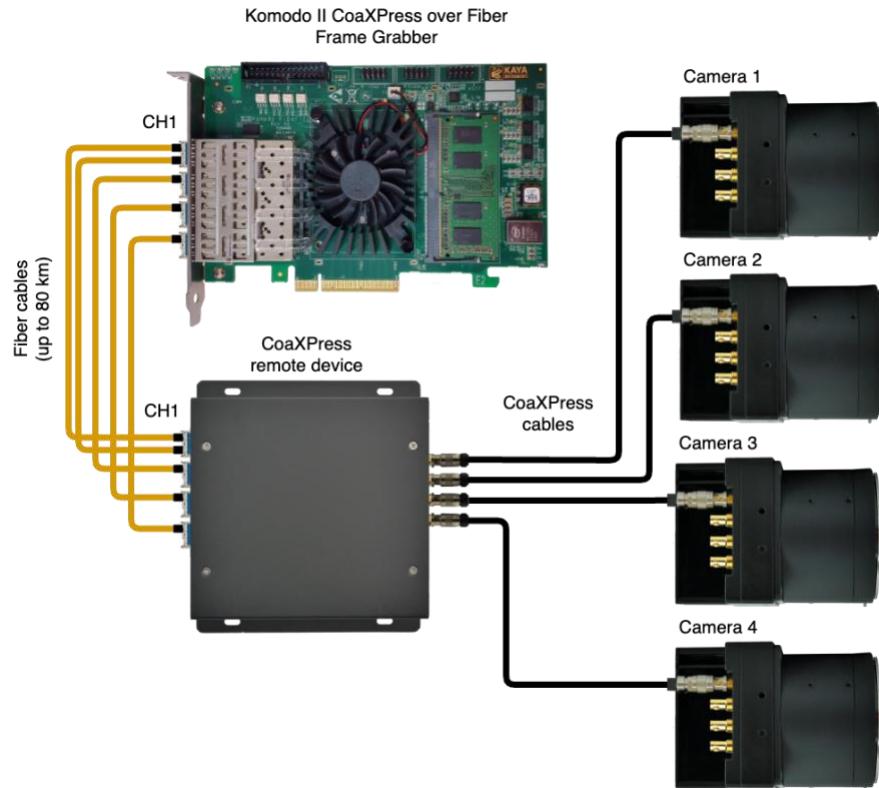

# COMPATIBILITY

**KAYA Instruments** creates and maintains compatibility and interfaces for the most common and advanced vision image processing libraries and applications. Major support is available for **MVTec Halcon**, **National Instruments' LabVIEW** and **MathWorks' MATLAB**.

Supported vision standards:



Supported vision libraries:



OpenCV

LabVIEW



COGNEX



NORPIX

Supported operating systems:



LINUX



NVIDIA  
JetPack

*Please check our website for an up-to-date list of other supported libraries and software package*

---

International Distributor



Sky Blue Microsystems GmbH  
Geisenhauenerstr. 18  
81379 Munich, Germany  
+49 89 780 2970, info@skyblue.de  
www.skyblue.de

Please feel free to contact our sales team for pricing, availability, documentation or customization at our e-mails – we will be happy to provide assistance and consultation.

Sales Inquiries: [info@skyblue.de](mailto:info@skyblue.de)  
Technical Support: [info@skyblue.de](mailto:info@skyblue.de)



© 2024 KAYA Instruments, Inc. All rights reserved. KAYA Instruments, the KAYA Instruments Komodo logo, JetCam logo, Predator, Iron and combinations thereof are trademarks of KAYA Instruments, Inc. in the United States and/or other jurisdictions. Microsoft Windows is a registered trademark of Microsoft Corporation. Other names are for informational purposes only and may be trademarks of their respective owners. KAYA Instruments is not liable for harm or damage incurred by information contained in this document.