

EMVA 1288 Datasheet

This datasheet describes the specification according to the standard 1288 Standard for Characterization and Presentation of Specification Data for Image Sensors and Cameras of European Machine Vision Association (EMVA) (See www.standard1288.org).

Vendor	KAYA Instruments	Sensor diagonal	8.4mm
Model	Iron2505HS-M	Sensor	GMAX2505
Camera type	Monochrome	Sensor type	CMOS
Date	05-Mar-2023 16:19:52	Shutter type	Global
Data type	Single	Overlap capabilities	Overlapping
Sensor type	CMOS	Frame rate	100 Hz
Lens category	C-Mount	Exposure control	by irradiance
Resolution	2600 x 2160 ,10 bits	Exposure time	2250.239 μ s
Pixel size	2.5 μ m x 2.5 μ m	Illumination	Variable with constant exposure time
Maximum readout rate	280 fps	Irradiation Steps	50
Dark current compensation	No	Irradiation calibration accuracy	-
Interface type	CXP-12	Irradiation measurement error	-
Serial number	2305023	Standart version	4.0 Linear
Firmware version	2.2.2-2023.2.27	Light source	Integrating Sphere

SkyBlue and Zerif

International Distributors



Sky Blue Microsystems GmbH
Geisenhausenerstr. 18
81379 Munich, Germany
+49 89 780 2970, info@skyblue.de
www.skyblue.de




In Great Britain:
Zerif Technologies Ltd.
Winnington House, 2 Woodberry Grove
Finchley, London N12 0DR
+44 115 855 7883, info@zerif.co.uk
www.zerif.co.uk


Summary Sheet for Operation Point 1 at a Wavelength of 520 nm

Camera setting		Operation point parameters	
Gain	2	Environmental temperature	21.56
Black level	-500	Camera body temperature	38.06
		Sensor temperature	48
		Processor temperature	48

Photon Transfer

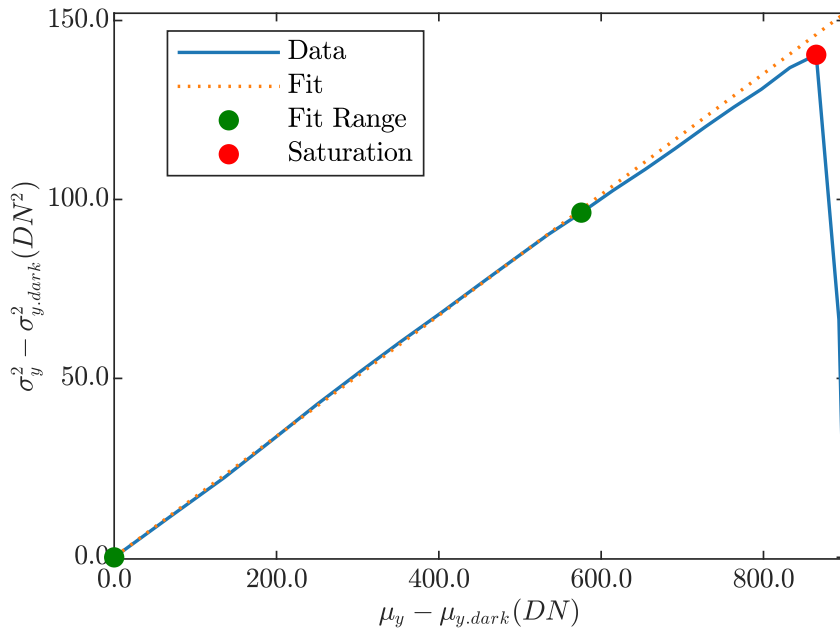


Signal-to-Noise Ratio

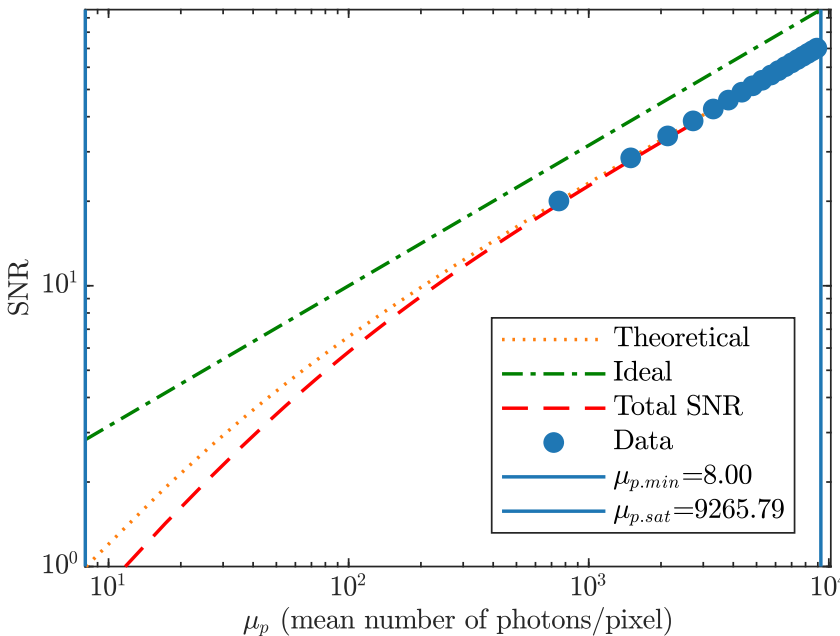


Performance		
Quantum efficiency		
η	55.4612	%
System gain		
K	0.16886	DN/e ⁻
1/K	5.9221	e ⁻ /DN
Temporal dark noise		
σ_d	3.5469	e ⁻
$\sigma_{y,dark}$	0.66487	DN
Signal-to-noise ratio		
SNR _{max}	71.6862	
	37.1087	dB
	6.1636	bit
1/SNR _{max}	1.395	%
Absolute sensitivity threshold		
$\mu_{e,min}$	4.4374	e ⁻
$\mu_{e,min,area}$	0.70999	e ⁻ /μm ²
Saturation capacity		
$\mu_{e,sat}$	5138.9156	e ⁻
$\mu_{e,sat,area}$	822.2265	e ⁻ /μm ²
Dynamic range		
DR	1158.079	
	61.2748	dB
	10.1775	bit
Spatial nonuniformities		
DSNU ₁₂₈₈	4.4692	e ⁻
DSNU _{1288,col}	0.68686	e ⁻
DSNU _{1288,row}	1.315	e ⁻
DSNU _{1288,pix}	4.2157	e ⁻
PRNU ₁₂₈₈	0.46399	%
PRNU _{1288,col}	0.080143	%
PRNU _{1288,row}	0.071867	%
PRNU _{1288,pix}	0.45133	%
Linearity error		
LE	0.0045493	%
Dark current		
$\mu_{l,mean}$	25.3076	e ⁻ /s
$\mu_{l,var}$	23.5284	e ⁻ /s


Stability check

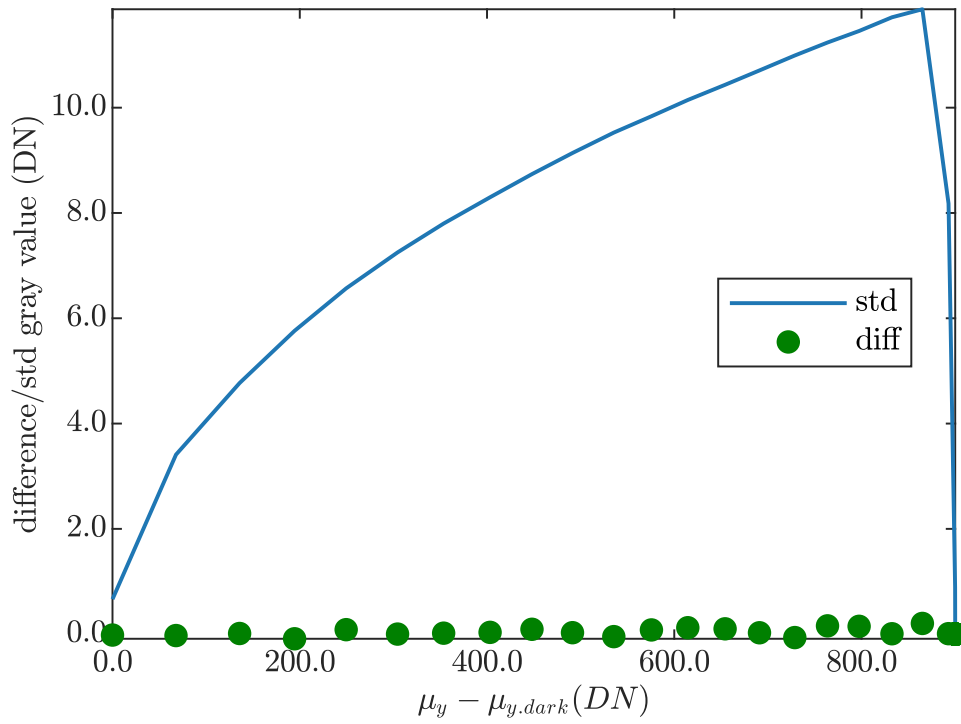


Sensitivity

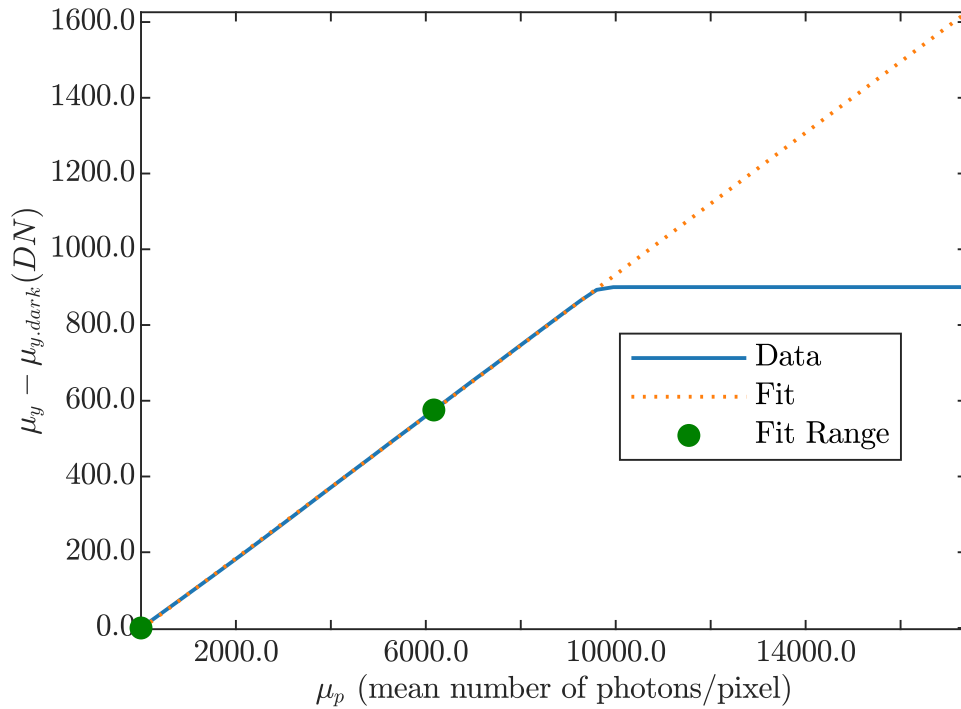


Linearity

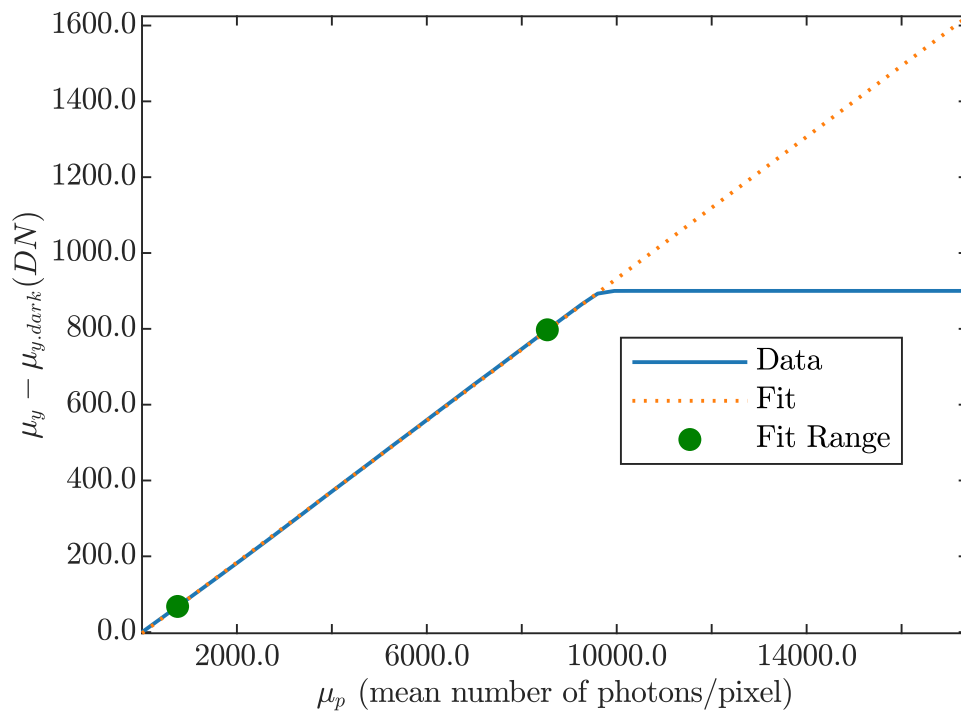


Deviation Linearity

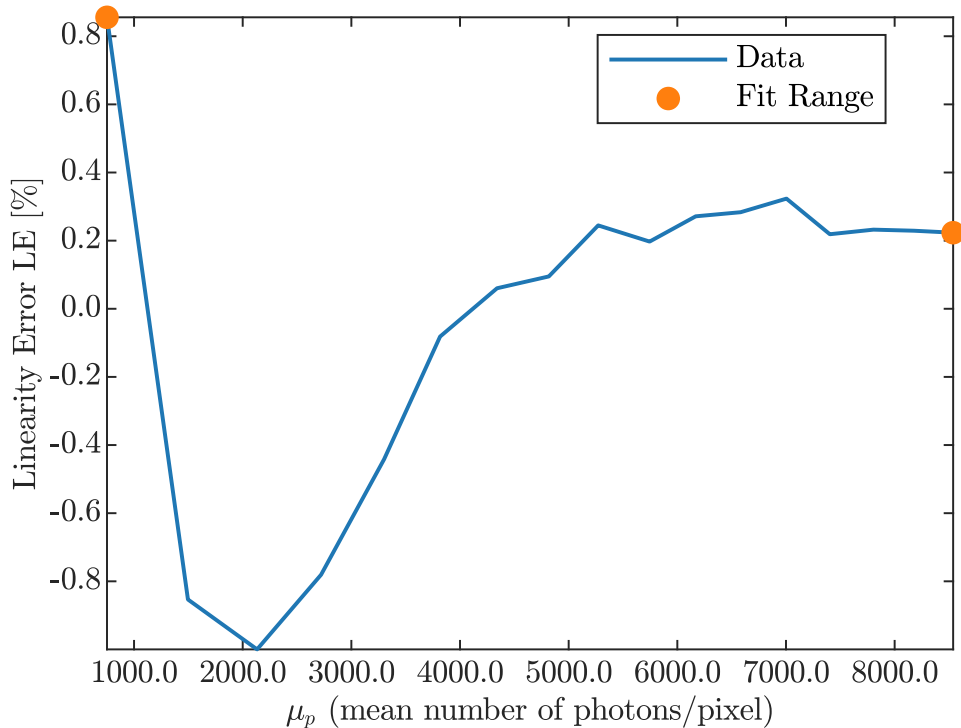


Horizontal Spectrogram PRNU

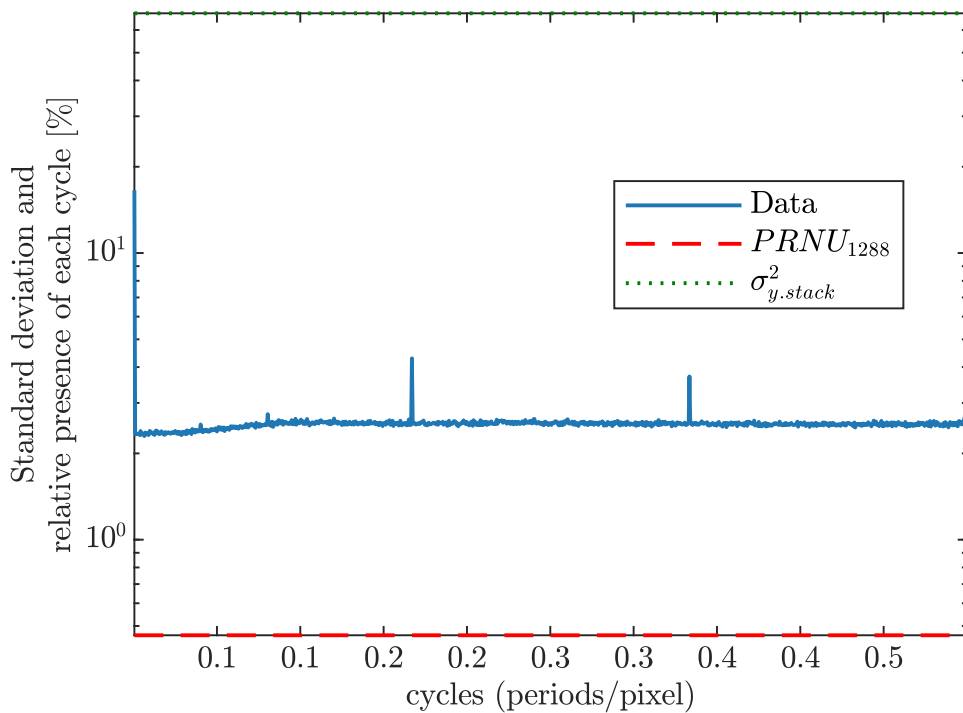


Horizontal Spectrogram DSNU

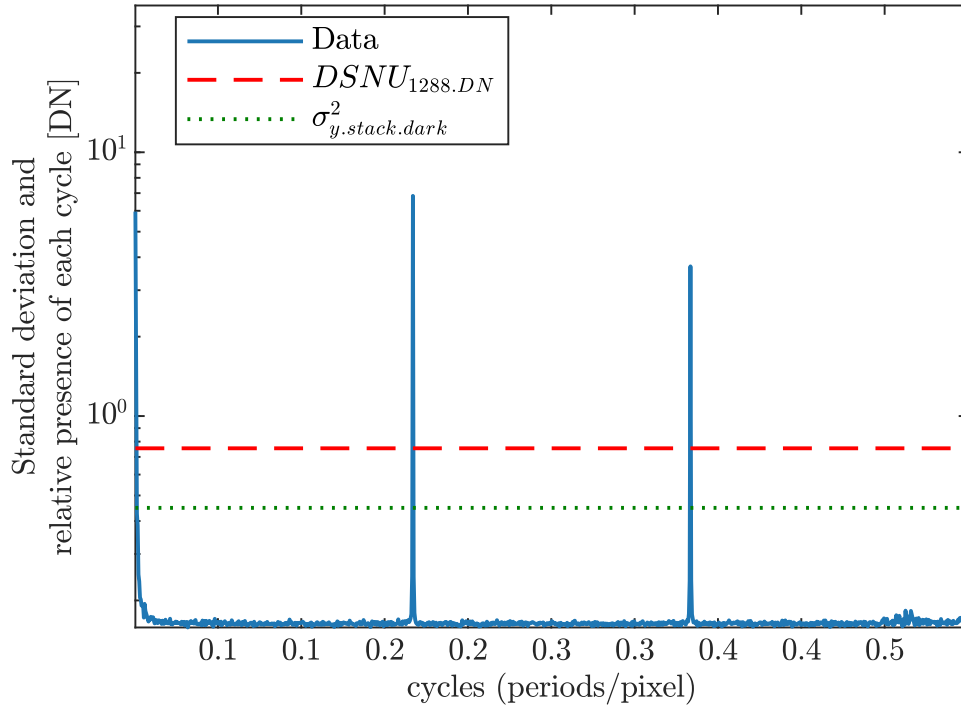


Vertical Spectrogram PRNU

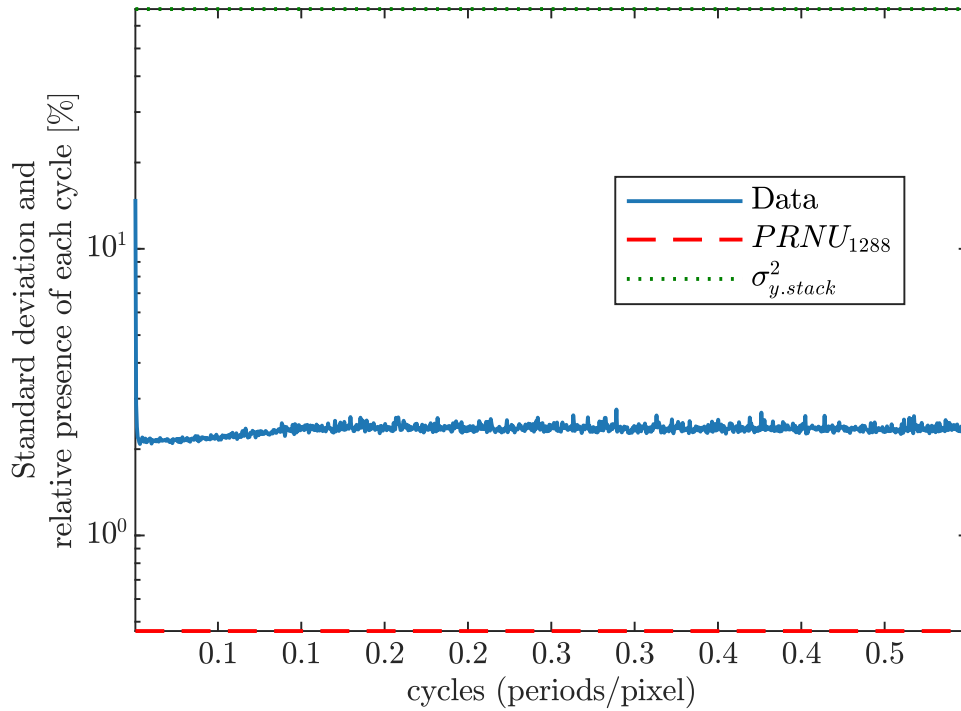


Vertical Spectrogram DSNU

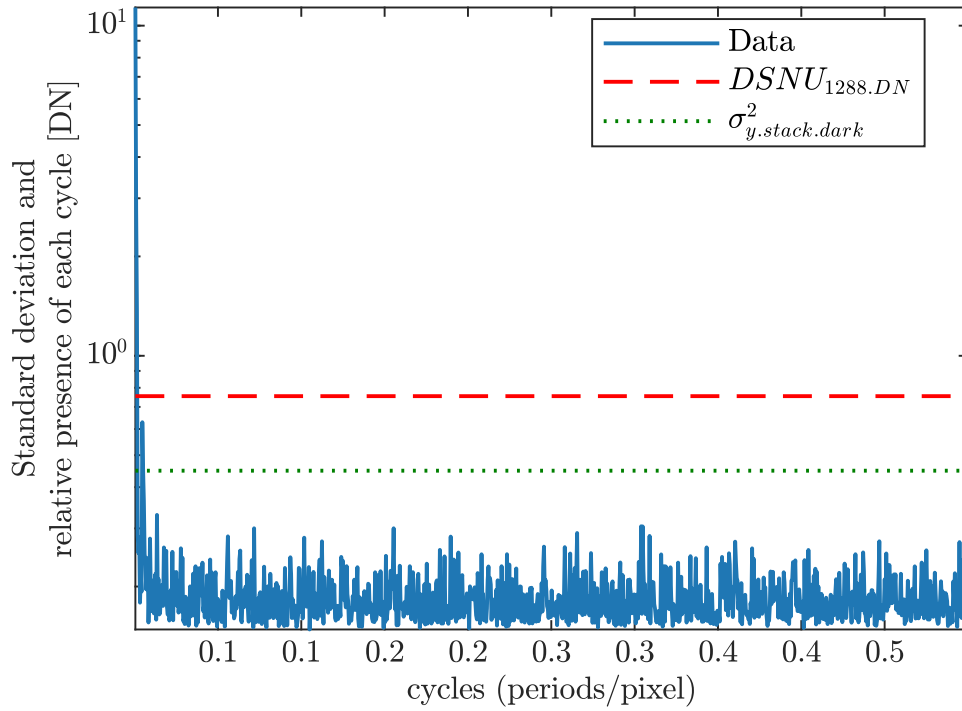


Logarithmic Histogram PRNU

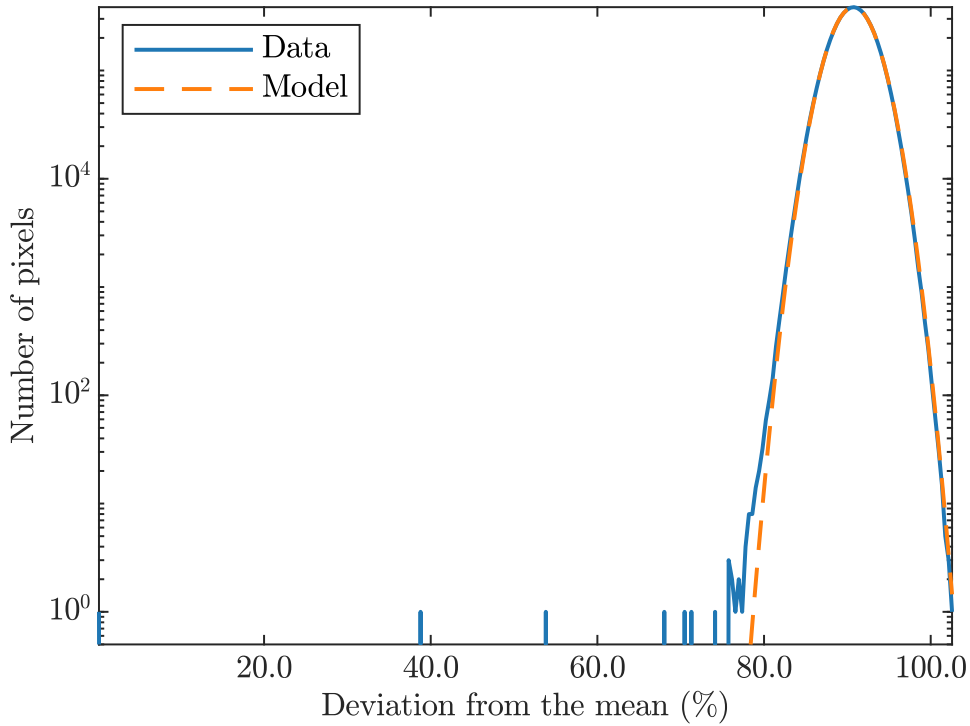


Logarithmic Histogram DSNU

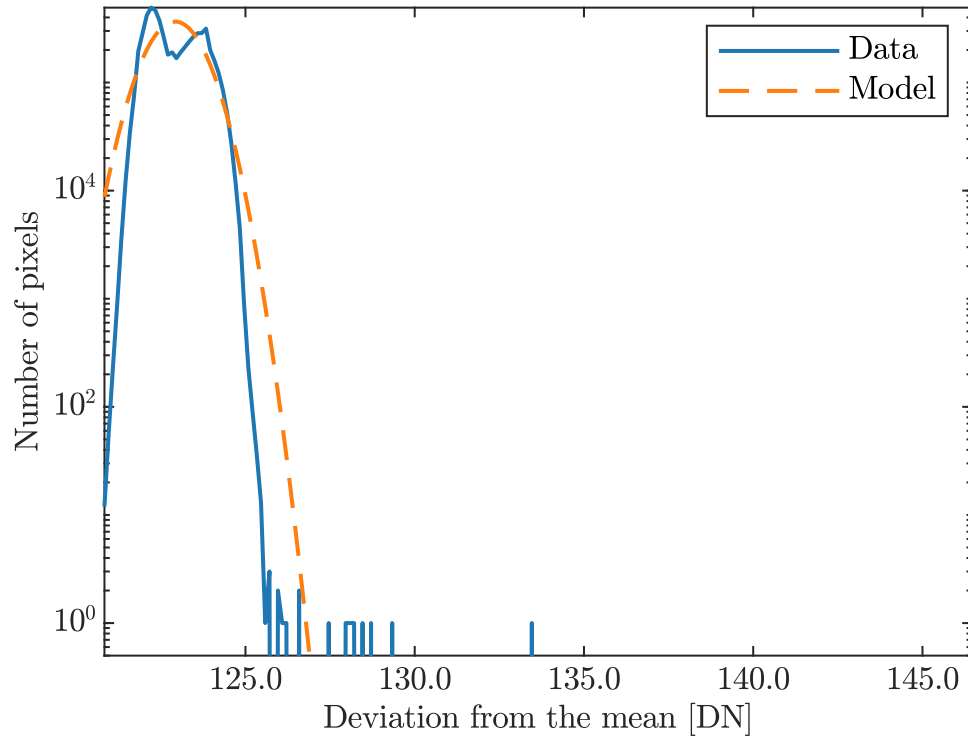


Accumulated Log Histogram PRNU

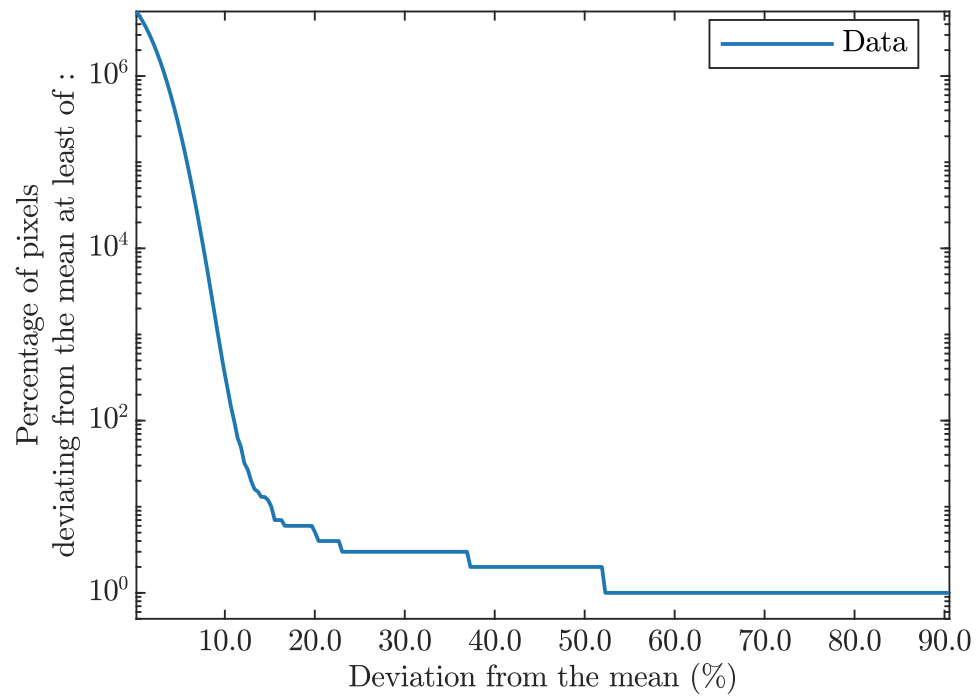


Accumulated Log Histogram DSNU

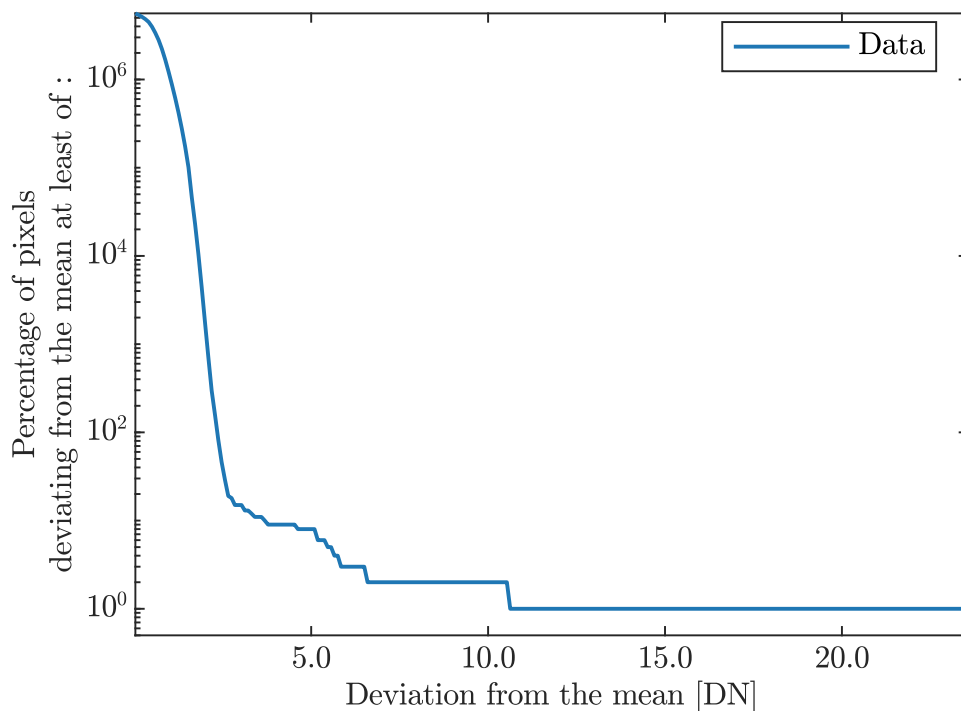

Horizontal Profile

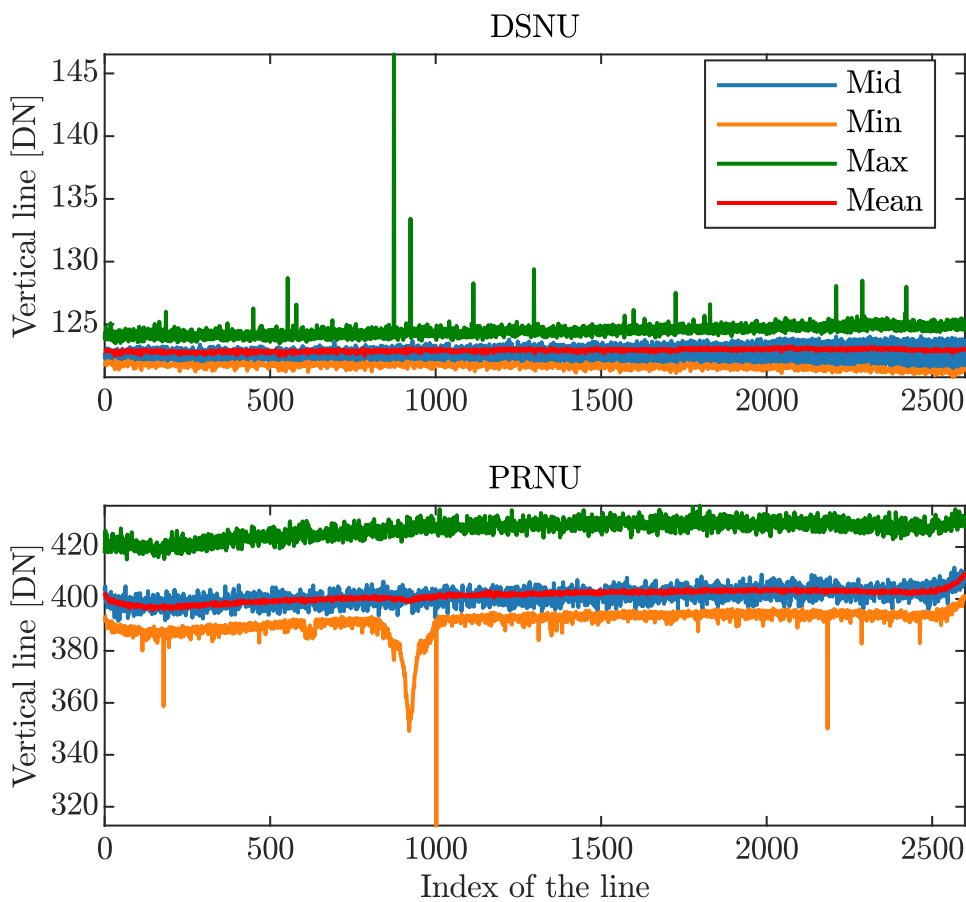


Vertical Profile

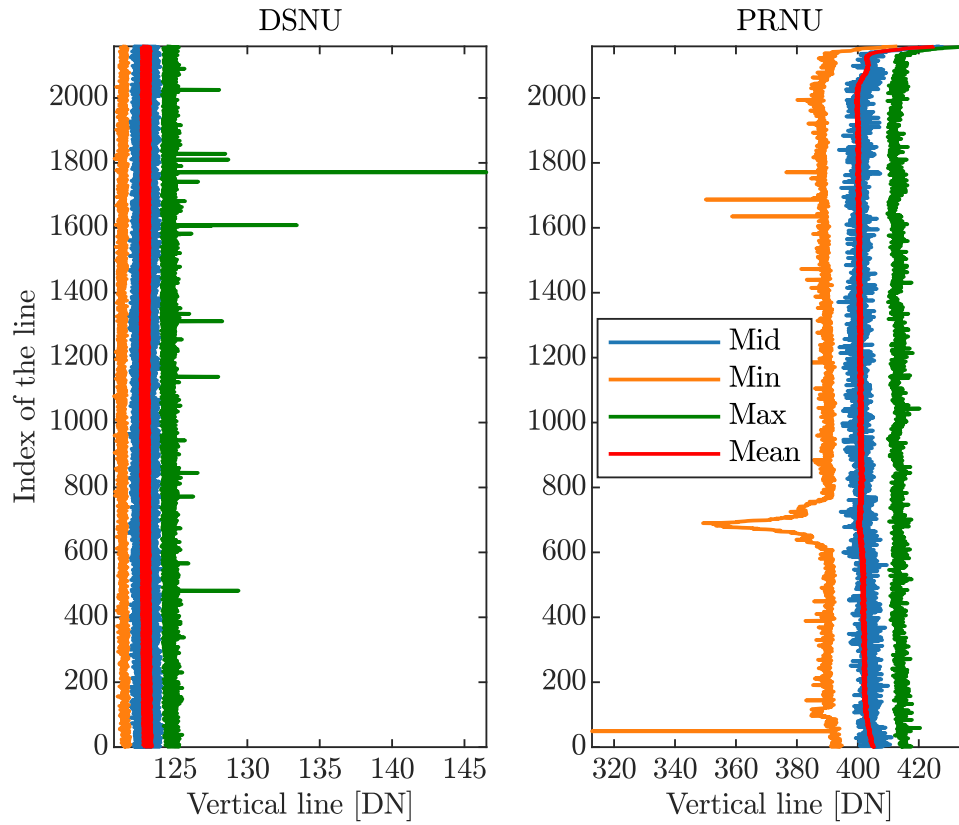


Dark Current

Dark Current from Mean

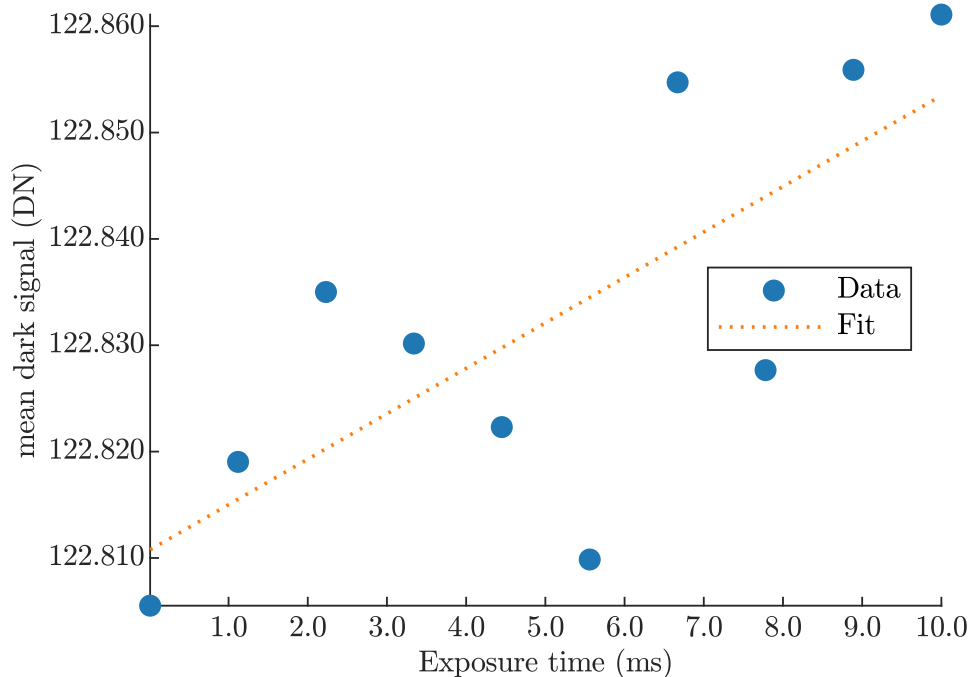

Dark Current from Variance

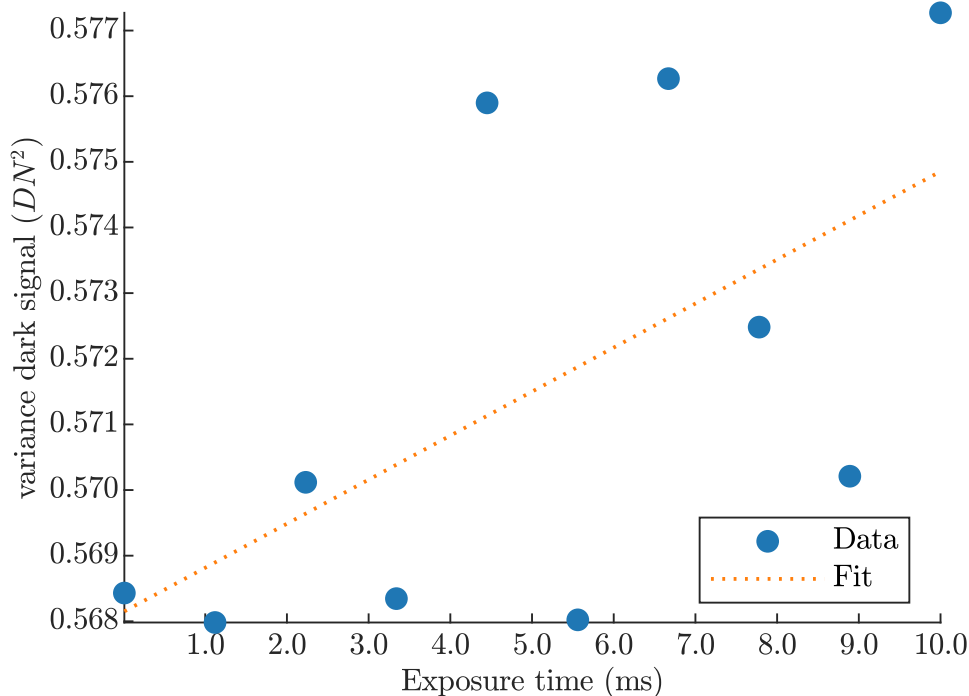

International Distributors



Sky Blue Microsystems GmbH
Geisenhausenerstr. 18
81379 Munich, Germany
+49 89 780 2970, info@skyblue.de
www.skyblue.de



In Great Britain:
Zerif Technologies Ltd.
Winington House, 2 Woodberry Grove
Finchley, London N12 0DR
+44 115 855 7883, info@zerif.co.uk
www.zerif.co.uk