

## Iron SDI 265

# Iron SDI Small Form Factor, Ruggedized Camera

### Innovative Approach

The **Iron SDI 265** is an ultra-thin, low-cost, low-power global shutter CMOS camera with an SDI interface which supports high quality video at rates up to 60 fps.

### Intelligent Design

Our camera incorporates Pregius's IMX265 global shutter sensor with a 3.45 $\mu$ m pixel size. With an extremely compact outline the **Iron** can be fitted into tight spaces. Superior sensor performance allows very low light vision capabilities.

### Applications:

- Perimeter vision
- Low light surveillance
- Special Effects
- Virtual Reality
- 3D

### Key Features:

- Maximal frame rate of up to 60 fps
- Up to 3.2W power at full rate
- Full image processing feature set
- Up to 3G-SDI interface
- C, CS, F or EF mounts available
- Commercial and rugged industrial grade options
- Full EMVA1288 report
- Full built-in self-test (BIT)
- Full built-in voltage testing
- Customization as per user requirements

## Specifications

Feature	Description
Pixel Size	3.45 $\mu\text{m}$ x 3.45 $\mu\text{m}$
Sensor	Pregius IMX265 CMOS Sensor
Video Output	2k, 1080p, 1080i up to 60 fps
Output Interface	Single-Link HD-SDI or 3D-SDI
Output Format	10-bit 4:2:2(Y'Cb'Cr') / RAW (Bayer)
Interface Connector	Micro-BNC
Electronic Shutter	Global shutter
Monochrome / Color	Color
Temporal Noise	< 2.2 $e^-$ @25°C
Full Well Charge	9828 $e^-$
Dynamic Range	> 70.8dB @520nm
Signal-to-Noise Ratio (SNR max)	40 dB @520nm
Quantum Efficiency (QE) X FF	> 63% @525nm
Shortest Exposure	10 $\mu\text{s}$
Exposure Control	Automatic Exposure/Gain, manual Exposure/Gain
Color Control	<ul style="list-style-type: none"> <li>▪ Auto/Manual White balance</li> <li>▪ LUT</li> <li>▪ RGB offsets, saturation control</li> <li>▪ Color correction matrix</li> </ul>
Image Enhancement	<ul style="list-style-type: none"> <li>▪ Defect pixel correction</li> <li>▪ Auto/Manual black level</li> <li>▪ Flat field / Fixed patter noise correction</li> <li>▪ Operational Time Counter</li> <li>▪ Binning</li> <li>▪ Image flip</li> </ul>
Camera Configuration	RS232 direct ASCII protocol
Synchronization	Tri-level sync input

## Mechanical & Electrical

Feature	Description
Dimensions (including lens mount)	44 mm x 44 mm x 39 mm (Height x Width x Depth)
Lens Mount	C-mount, CS-mount, F-mount or EF-mount
Weight (without lens)	~90g
Power Input	7-18V
Power Consumption	<3.2W @ 12V DC
Operating Temperature	Commercial: 0°C to 50°C, 20-85% humidity (non-condensing) Industrial: -40°C to 80°C, 20-85% humidity (non-condensing)
Storage Temperature	Commercial: 0°C to 55°C, 20-85% humidity (non-condensing) Industrial: -40°C to 85°C, 20-85% humidity (non-condensing)
Ingress Protection	Optional IP67 (with protective lens tube)
Operational Shock	Tested per MIL-STD-810G Method 516.6, 3-axis Shock 75G
Operational Vibration	Tested per MIL-STD-810G Method 514.6, 3-axis Vibration Category 20


\* KAYA Instruments reserves the right to update the data sheet from time to time without prior notice.

## Iron SDI Supported Video Modes

Mode	Video Standard	Supported Resolution	Supported FPS
HD-SDI	ST 292 (ST 274)	1080i 10-bit 4:2:2/RAW	50, 59.94, 60
		1080p 10-bit 4:2:2/RAW	23.98, 24, 25, 29.97, 30
3G-SDI	ST 292 (ST 2048-2)	2K 10-bit 4:2:2/RAW	23.98, 24, 25, 29.97, 30
	ST 425-1 (ST 274)	1080p 10-bit 4:2:2/RAW	50, 59.94, 60
	ST 425-1 (ST 2048-2)	2K 10-bit 4:2:2/RAW	47.95, 48, 50, 59.94, 60

## Ordering Information


KAYA's Part Numbers are intuitive and derived directly from the product's properties. Each index represents a different property of the camera, according to the following diagram:

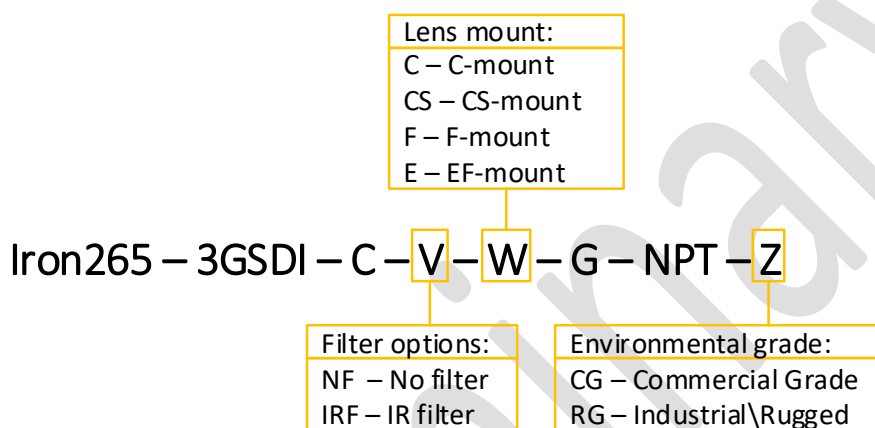

For example: an Iron SDI 265 camera with an UV-IR cut filter and C-mount that is rated for commercial use would go by Iron255-3GSDI-C-IRF-C-G-NPT-CG. Please contact a sales representative over at [info@skyblue.de](mailto:info@skyblue.de) for a full list of peripherals including cables and frame grabbers.

## General Purpose Input Output

GPIO Pinout – 12 Pin Hirose Connector




- |                       |                           |
|-----------------------|---------------------------|
| 1. DC Power return    | 7. OUT1 (TTL)             |
| 2. DC Power           | 8. Tri Level Sync Input   |
| 3. RS232 RX           | 9. IN2 (LVTTTL)           |
| 4. RS232 TX           | 10. Tri Level Sync Return |
| 5. OUT2 Return (OPTO) | 11. IN2 Return (LVTTTL)   |
| 6. RS232 Return       | 12. OUT2 (OPTO)           |

The GPIO connector used on the camera is a 12 pin male Hirose connector. It is recommended to use a cable with a matching Hirose 12 pin female connector. Hirose's manufacturer's part number is listed below:


Product Name	Product Part Number
Hirose 12P connector, male	HR10A-10R-12PB
Hirose 12P connector, female	HR10A-10P-12S

# Absolute Quantum Efficiency

Pregius's IMX265 Color Spectral Response

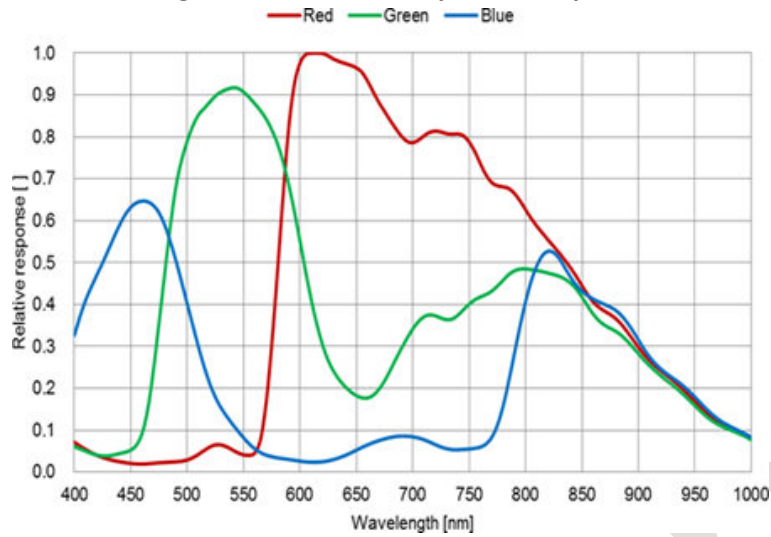

## Mechanical Drawings

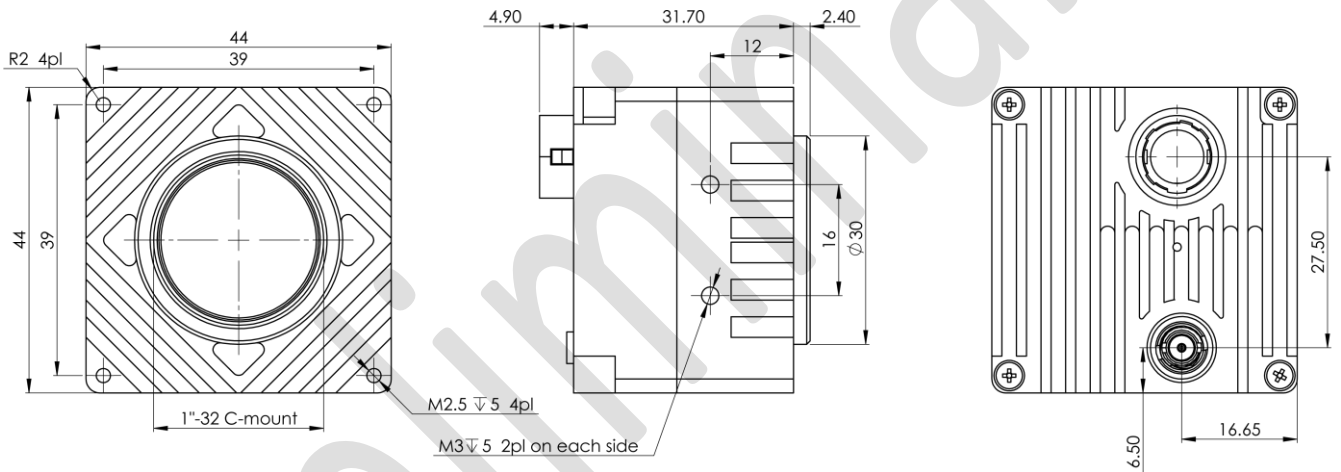

## Contact Us

Please feel free to contact our team with any question or further inquiry at [info@skyblue.de](mailto:info@skyblue.de) – we will be happy to provide assistance and consultation.

International Distributors



Sky Blue Microsystems GmbH  
Geisenhausenerstr. 18  
81379 Munich, Germany  
+49 89 780 2970, [info@skyblue.de](mailto:info@skyblue.de)  
[www.skyblue.de](http://www.skyblue.de)



In Great Britain:  
Zerif Technologies Ltd.  
Winnington House, 2 Woodberry Grove  
Finchley, London N12 0DR  
+44 115 855 7883, [info@zerif.co.uk](mailto:info@zerif.co.uk)  
[www.zerif.co.uk](http://www.zerif.co.uk)